

Antenna Enclosure Kit

- Innovative flexible modular solution enabling suitable sites to be upgraded to 5G capability
- The module installs directly above an existing, suitable passive antenna to provide the appearance of a single integrated antenna unit – potentially simplifying site zoning approvals
- Installed antenna units can be swapped out on site e.g. to perform capacity upgrades
- Compatible specifically with antennas featuring CommScope's 498 x 197 mm (WxD) radome housing
- Can be deployed as a standalone solution
- Compatible with certain specific Ericsson Active Antenna System Products (AAS)
- Includes Antenna Enclosure Housing, Installation Kit for compatible Ericsson mMIMO Active Antenna (AAS), AEKT-E1 Mounting Hardware, protective "Windshield" Panels and Top Cap
- A Mounting Kit for the antenna installed below the AEKT-E1 unit should be ordered separately, Commscope P/N: BSAMNT-AEKT (required when installing the AEKT-E1 module directly on top of an antenna)
- Contact your CommScope representative for further details

General Specifications

Antenna Type	Antenna enclosure kit
Color	Light Gray (RAL 7035)
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Dimensions	
Width	498 mm 19.606 in
Depth	199 mm 7.835 in
Length	1100 mm 43.307 in
Net Weight, without mounting kit	9.29 kg 20.481 lb


Application Drawing

Page 1 of 3

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: January 19, 2024



AEKT-E1

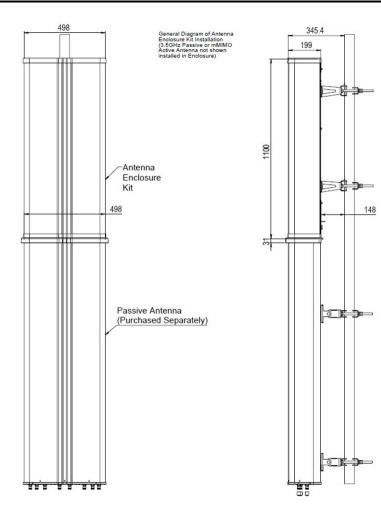

Mechanical Specifications

Effective Projective Area (EPA), frontal Effective Projective Area (EPA), lateral Wind Loading @ Velocity, frontal Wind Loading @ Velocity, lateral Wind Loading @ Velocity, rear Wind Speed, maximum 0.66 m² | 7.104 ft² 0.29 m² | 3.122 ft² 700.0 N @ 150 km/h (157.4 lbf @ 150 km/h) 308.0 N @ 150 km/h (69.2 lbf @ 150 km/h) 700.0 N @ 150 km/h (157.4 lbf @ 150 km/h) 241 km/h (150 mph)

Packaging and Weights

Width, packed Depth, packed

620 mm	24.409 in
350 mm	13.78 in

Page 2 of 3

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: January 19, 2024

COMMSCOPE°

AEKT-El

Length, packed	1430 mm 56.299 in
Included	Brackets Hardware
Weight, gross	25.94 kg 57.188 lb
Weight, net	19.65 kg 43.321 lb

Regulatory Compliance/Certifications

Agency	Classification
CE	Compliant with the relevant CE product directives
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant
(()	

Included Products

AEKTMNT-E1

- Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members.

* Footnotes

Performance Note Severe environmental conditions may degrade optimum performance

Page 3 of 3

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: January 19, 2024

