



Fiber OSP cable, Outdoor Steel Armored, Gel-Free, Stranded Loose Tube Rollable Ribbon, 1152 fiber, Singlemode G.652.D and G.657.A1, Feet jacket marking, Black jacket color

## Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	CommScope®
Product Type	Fiber OSP cable
Product Series	D-LA


## General Specifications

Cable Type	Ribbon loose tube
Construction Type	Armored
Subunit Type	Gel-free
Fibers per Ribbon, quantity	12
Filler, quantity	2
Jacket Color	Black
Jacket Marking	Feet
Subunit, quantity	4
Fibers per Subunit, quantity	288
Total Fiber Count	1152

## Dimensions

Buffer Tube/Subunit Diameter	7.2 mm   0.283 in
Diameter Over Jacket	26.8 mm   1.055 in

## Representative Image

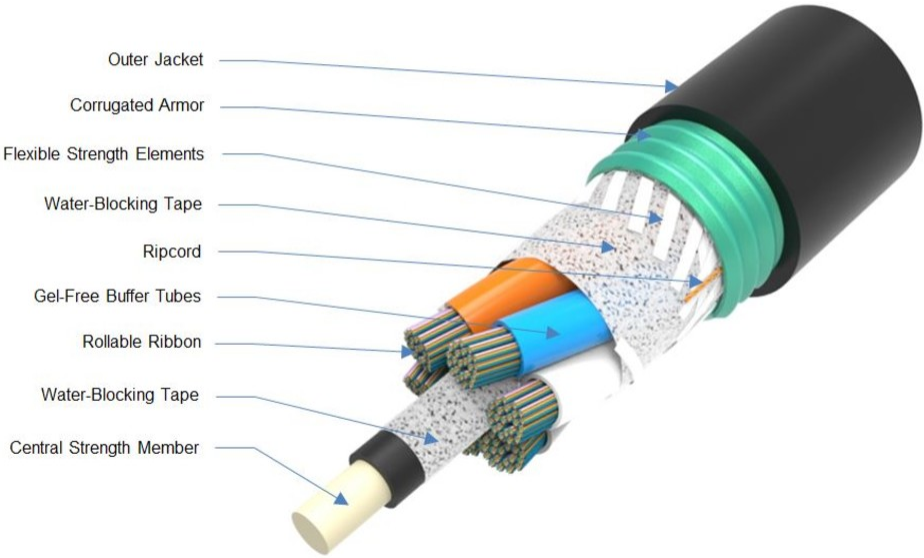

## Mechanical Specifications

Minimum Bend Radius, loaded	402 mm   15.827 in
Minimum Bend Radius, unloaded	402 mm   15.827 in
Tensile Load, long term, maximum	1480 N   332.717 lbf
Tensile Load, short term, maximum	4450 N   1,000.4 lbf
Compression	22 N/mm   125.623 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3
Flex	25 cycles
Flex Test Method	FOTP-104   IEC 60794-1 E6
Impact	4.4 N-m   38.943 in lb
Impact Test Method	FOTP-25   IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1 E7

## Optical Specifications

Fiber Type	G.652.D and G.657.A1   G.652.D and G.657.A1
------------	---

### Environmental Specifications

Installation temperature	-30 °C to +60 °C (-22 °F to +140 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +75 °C (-40 °F to +167 °F)
Cable Qualification Standards	ANSI/ICEA S-87-640   RUS PE-90 (7CFR 1755.900)   Telcordia GR-20
Environmental Space	Aerial, lashed   Buried
Jacket UV Resistance	UV stabilized
Water Penetration	24 h
Water Penetration Qualification Method	ANSI/ICEA S-87-640
Water Penetration Test Method	FOTP-82   IEC 60794-1 F5

### Environmental Test Specifications

Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-30 °C to +60 °C (-22 °F to +140 °F)
Low High Bend Test Method	FOTP-37   IEC 60794-1 E11
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1 F1

### Packaging and Weights

Cable weight	546 kg/km   366.895 lb/kft
--------------	----------------------------

### Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

### Included Products

CS-8W-RR-OUTDOOR – TeraSPEED® Singlemode Fiber Rollable Ribbon

### \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable