

# SS-65T-F

---



4-port small cell antenna, 4x 3300–4200 MHz, 65° HPBW, fixed electrical tilt

- Supports 4T4R radios operating in B42, B43, Bn77, Bn78
- NEX10 connectors on back
- In cases where the antenna is to be mounted on a customer supplied pole (40-100mm diameter), Qty1 Mounting Kit Part No. BSAMNT-S should be purchased separately
- Designed for strand mounting with OEM equipment

## General Specifications


<b>Antenna Type</b>	Small Cell
<b>Band</b>	Single band
<b>Color</b>	Light Gray (RAL 7035)
<b>Grounding Type</b>	RF connector inner conductor and body grounded to reflector and mounting bracket
<b>Performance Note</b>	Outdoor usage
<b>Radome Material</b>	ASA+PC, UV stabilized
<b>Radiator Material</b>	Low loss circuit board
<b>Reflector Material</b>	Aluminum
<b>RF Connector Interface</b>	NEX10 Female
<b>RF Connector Location</b>	Side back
<b>RF Connector Quantity, high band</b>	4
<b>RF Connector Quantity, total</b>	4

## Dimensions

<b>Width</b>	200 mm   7.874 in
<b>Depth</b>	44 mm   1.732 in
<b>Length</b>	200 mm   7.874 in
<b>Net Weight, antenna only</b>	0.7 kg   1.543 lb

## Array Layout

# SS-65T-F

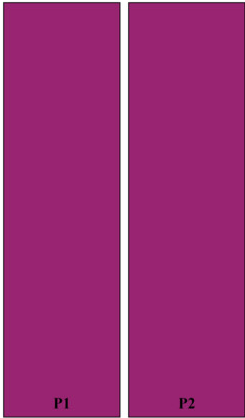

Array ID	Frequency (MHz)	RF Connector	HPBW	RET (N/A)	AISG No.	AISG RET UID
P1	3300-4200	1 - 2	65°	N/A	NA	N/A
P2	3300-4200	3 - 4	65°			

(Sizes of colored boxes are not true depictions of array sizes)

## Port Configuration



## Electrical Specifications

<b>Impedance</b>	50 ohm
<b>Operating Frequency Band</b>	3300 – 4200 MHz

# SS-65T-F

**Polarization** ±45°

## Electrical Specifications

	<b>P1,P2</b>	<b>P1,P2</b>
<b>Frequency Band, MHz</b>	<b>3300–3800</b>	<b>3700–4200</b>
<b>RF Port</b>	1,2,3,4	1,2,3,4
<b>Gain at Mid Tilt, dBi</b>	12.7	12.9
<b>Beamwidth, Horizontal, degrees</b>	63	62
<b>Beamwidth, Vertical, degrees</b>	27.5	25
<b>Beam Tilt, degrees</b>	6	6
<b>USLS (First Lobe), dB</b>	18	18
<b>Front-to-Back Ratio, Copolarization 180° ± 30°, dB</b>	31	29
<b>Isolation, Cross Polarization, dB</b>	22	22
<b>Isolation, Inter-band, dB</b>	22	22
<b>VSWR   Return loss, dB</b>	1.5   14.0	1.5   14.0
<b>PIM, 3rd Order, 2 x 20 W, dBc</b>	-140	-140
<b>Input Power per Port, maximum, watts</b>	50	50

## Electrical Specifications, BASTA

	<b>3300–3800</b>	<b>3700–4200</b>
<b>Frequency Band, MHz</b>	<b>3300–3800</b>	<b>3700–4200</b>
<b>Gain by all Beam Tilts, average, dBi</b>	12.5	12.6
<b>Gain by all Beam Tilts Tolerance, dB</b>	±0.4	±0.4
<b>Beamwidth, Horizontal Tolerance, degrees</b>	±1.9	±2.4
<b>Beamwidth, Vertical Tolerance, degrees</b>	±2.1	±1.4
<b>CPR at Boresight, dB</b>	16	19
<b>CPR at Sector, dB</b>	10	10

## Mechanical Specifications

<b>Wind Loading @ Velocity, frontal</b>	60.8 N @ 150 km/h (13.7 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, lateral</b>	13.4 N @ 150 km/h (3.0 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, rear</b>	60.8 N @ 150 km/h (13.7 lbf @ 150 km/h)
<b>Wind Speed, maximum</b>	241 km/h (150 mph)

## Packaging and Weights

**Width, packed** 250 mm | 9.843 in

# SS-65T-F

---

<b>Depth, packed</b>	125 mm   4.921 in
<b>Length, packed</b>	250 mm   9.843 in
<b>Weight, gross</b>	1 kg   2.205 lb

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant



### \* Footnotes

<b>Performance Note</b>	Severe environmental conditions may degrade optimum performance
-------------------------	---