


# LSF2-50-43B

---

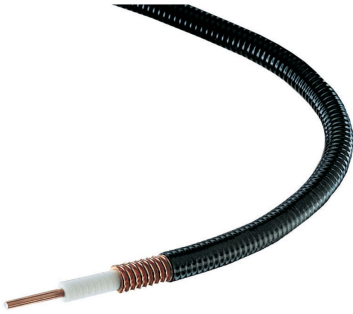

LSF2-50, HELIAX® Superflexible Foam Coaxial Cable, corrugated copper, 3/8 in, black PE jacket (Not for Individual Sale - Jumpers only)

## Product Classification

<b>Product Type</b>	Coaxial wireless cable
<b>Product Brand</b>	HELIAX®   SureFlex®
<b>Product Series</b>	LSF2-50   MLOC
<b>Ordering Note</b>	CommScope® standard product (Global)

## General Specifications

<b>Flexibility</b>	Superflexible
<b>Jacket Color</b>	Black
<b>Performance Note</b>	Attenuation values typical, guaranteed within 5%

## Dimensions

<b>Diameter Over Dielectric</b>	7.645 mm   0.301 in
<b>Diameter Over Jacket</b>	11.024 mm   0.434 in
<b>Inner Conductor OD</b>	3.048 mm   0.12 in
<b>Outer Conductor OD</b>	9.906 mm   0.39 in
<b>Nominal Size</b>	3/8 in

## Electrical Specifications

<b>Cable Impedance</b>	50 ohm ±1 ohm
<b>Capacitance</b>	80.7 pF/m   24.597 pF/ft
<b>dc Resistance, Inner Conductor</b>	3.65 ohms/km   1.113 ohms/kft
<b>dc Resistance, Outer Conductor</b>	4.64 ohms/km   1.414 ohms/kft
<b>dc Test Voltage</b>	2500 V
<b>Inductance</b>	0.202 µH/m   0.062 µH/ft

# LSF2-50-43B

<b>Insulation Resistance</b>	100000 MOhms-km
<b>Jacket Spark Test Voltage (rms)</b>	5000 V
<b>Operating Frequency Band</b>	1 – 10200 MHz
<b>Peak Power</b>	15.6 kW
<b>Velocity</b>	82 %

## VSWR/Return Loss

<b>Frequency Band</b>	<b>VSWR</b>	<b>Return Loss (dB)</b>
<b>680–806 MHz</b>	1.15	23.13
<b>806–906 MHz</b>	1.13	24.29
<b>1427–1535 MHz</b>	1.13	24.29
<b>1700–2300 MHz</b>	1.15	23.13
<b>2535–2655 MHz</b>	1.253	18.99
<b>3480–3800 MHz</b>	1.253	18.99
<b>4400–4900 MHz</b>	1.253	18.99

## Attenuation

<b>Frequency (MHz)</b>	<b>Attenuation (dB/100 m)</b>	<b>Attenuation (dB/100 ft)</b>	<b>Average Power (kW)</b>
<b>1.0</b>	0.422	0.129	15.6
<b>1.5</b>	0.501	0.153	15.6
<b>2.0</b>	0.567	0.173	14.27
<b>10.0</b>	1.179	0.359	6.86
<b>20.0</b>	1.641	0.5	4.93
<b>30.0</b>	1.998	0.609	4.05
<b>50.0</b>	2.567	0.782	3.15
<b>85.0</b>	3.342	1.019	2.42
<b>88.0</b>	3.4	1.036	2.38
<b>100.0</b>	3.625	1.105	2.23
<b>108.0</b>	3.768	1.148	2.15
<b>150.0</b>	4.447	1.355	1.82
<b>174.0</b>	4.795	1.461	1.69
<b>200.0</b>	5.147	1.569	1.57
<b>204.0</b>	5.199	1.585	1.56
<b>300.0</b>	6.336	1.931	1.28
<b>400.0</b>	7.351	2.241	1.1

# LSF2-50-43B

---

<b>450.0</b>	7.815	2.382	1.03
<b>460.0</b>	7.905	2.409	1.02
<b>500.0</b>	8.257	2.517	0.98
<b>512.0</b>	8.36	2.548	0.97
<b>600.0</b>	9.084	2.769	0.89
<b>700.0</b>	9.851	3.003	0.82
<b>800.0</b>	10.572	3.222	0.77
<b>824.0</b>	10.739	3.273	0.75
<b>894.0</b>	11.214	3.418	0.72
<b>960.0</b>	11.648	3.55	0.69
<b>1000.0</b>	11.904	3.628	0.68
<b>1218.0</b>	13.231	4.033	0.61
<b>1250.0</b>	13.417	4.089	0.6
<b>1500.0</b>	14.806	4.512	0.55
<b>1700.0</b>	15.848	4.83	0.51
<b>1794.0</b>	16.32	4.974	0.5
<b>1800.0</b>	16.35	4.983	0.49
<b>2000.0</b>	17.321	5.279	0.47
<b>2100.0</b>	17.791	5.423	0.45
<b>2200.0</b>	18.253	5.563	0.44
<b>2300.0</b>	18.706	5.701	0.43
<b>2500.0</b>	19.589	5.97	0.41
<b>2700.0</b>	20.445	6.231	0.4
<b>3000.0</b>	21.682	6.608	0.37
<b>3400.0</b>	23.26	7.089	0.35
<b>3600.0</b>	24.022	7.321	0.34
<b>3700.0</b>	24.396	7.436	0.33
<b>3800.0</b>	24.767	7.549	0.33
<b>3900.0</b>	25.134	7.661	0.32
<b>4000.0</b>	25.498	7.771	0.32
<b>4100.0</b>	25.858	7.881	0.31
<b>4200.0</b>	26.215	7.99	0.31
<b>4300.0</b>	26.569	8.098	0.3
<b>4400.0</b>	26.92	8.205	0.3
<b>4500.0</b>	27.267	8.311	0.3

# LSF2-50-43B

---

<b>4600.0</b>	27.612	8.416	0.29
<b>4700.0</b>	27.954	8.52	0.29
<b>4800.0</b>	28.294	8.623	0.29
<b>4900.0</b>	28.63	8.726	0.28
<b>5000.0</b>	28.965	8.828	0.28
<b>6000.0</b>	32.183	9.809	0.25
<b>8000.0</b>	38.096	11.611	0.21
<b>8800.0</b>	40.314	12.287	0.2
<b>10000.0</b>	43.516	13.263	0.19

## Material Specifications

<b>Dielectric Material</b>	Foam PE
<b>Jacket Material</b>	PE
<b>Inner Conductor Material</b>	Copper-clad aluminum wire
<b>Outer Conductor Material</b>	Corrugated copper

## Mechanical Specifications

<b>Minimum Bend Radius, multiple Bends</b>	25.4 mm   1 in
<b>Minimum Bend Radius, single Bend</b>	25.4 mm   1 in
<b>Number of Bends, minimum</b>	15
<b>Tensile Strength</b>	118 kg   260.145 lb
<b>Bending Moment</b>	2.2 N-m   19.472 in lb
<b>Flat Plate Crush Strength</b>	2 kg/mm   111.995 lb/in

## Environmental Specifications

<b>Installation temperature</b>	-40 °C to +60 °C (-40 °F to +140 °F)
<b>Operating Temperature</b>	-55 °C to +85 °C (-67 °F to +185 °F)
<b>Storage Temperature</b>	-70 °C to +85 °C (-94 °F to +185 °F)
<b>Attenuation, Ambient Temperature</b>	68 °F   20 °C
<b>Average Power, Ambient Temperature</b>	104 °F   40 °C
<b>Average Power, Inner Conductor Temperature</b>	212 °F   100 °C
<b>EN50575 CPR Cable EuroClass Fire Performance</b>	Fca

## Packaging and Weights

# LSF2-50-43B

---

**Cable weight**

0.11 kg/m | 0.074 lb/ft

## Regulatory Compliance/Certifications

**Agency**

**Classification**

CENELEC

EN 50575 compliant, Declaration of Performance (DoP) available

ISO 9001:2015

Designed, manufactured and/or distributed under this quality management system

