

# D-DD

---

## Base Product



## Fiber Optic Cable, Drop, Outdoor Arid Core Gel-Free Tubes, Double Jacket Dielectric

- Fiber drop cables are typically used between the fiber terminal and the building or home and available for various indoor or outdoor applications
- Fiber drop cables are engineered to withstand the most demanding environmental conditions, including sun, heat, cold, moisture and heavy RF interference
- Superior mechanical and optical performance with unmatched stability and quality

## Product Classification


<b>Regional Availability</b>	Asia   Australia/New Zealand   EMEA   Latin America   North America
<b>Portfolio</b>	CommScope®
<b>Product Type</b>	Fiber drop cable
<b>Product Series</b>	D-DD

## General Specifications

<b>Construction Type</b>	Non-armored
<b>Subunit Type</b>	Gel-free
<b>Inner Jacket Color</b>	White
<b>Jacket Color</b>	Black

## Ordering Tree

# D-DD

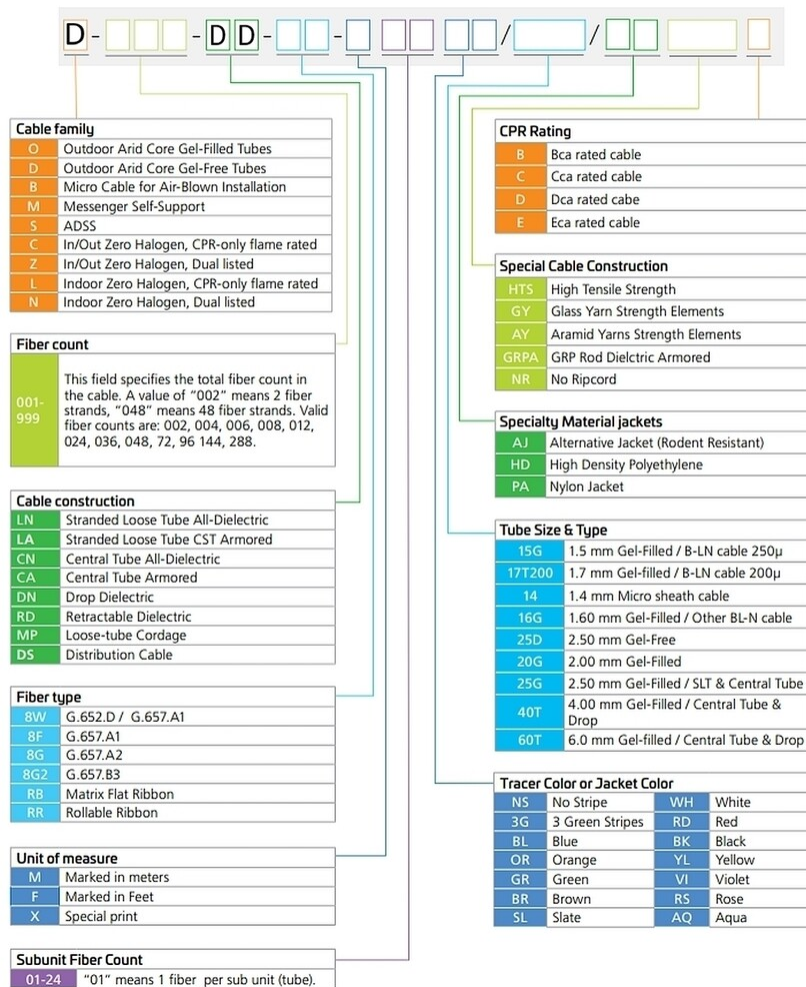

## Material Specifications

- Jacket Material** High density polyethylene (HDPE)
- Inner Jacket Material** Low Smoke Zero Halogen (LSZH)

## Environmental Specifications

- Operating Temperature** -40 °C to +70 °C (-40 °F to +158 °F)
- Storage Temperature** -40 °C to +70 °C (-40 °F to +158 °F)
- Cable Qualification Standards** IEC 60794-1-2
- Jacket UV Resistance** UV stabilized

## \* Footnotes

# D-DD

---

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable