

810010260/50 | O-004-DF-HY-F04NS/8W004 /1X24AWG (5000')



Fiber Hybrid drop cable, LightScope ZWP® Fiber + Tone Wire Outdoor, 4 fiber Arid Core construction, central loose tube, Gel-filled, Singlemode G.652.D and G.657.A1, Feet jacket marking, Black jacket color, 5000 ft

- *Product complies with the Build America, Buy America Act (BABAA) requirements of the Infrastructure Investment and Jobs Act of 2021 (Pub. L. 117- 58, §§ 70901-70953), or is the subject of a waiver approved by the Secretary of Commerce or designee. Compliance requirements and waiver applicability vary based on government funding program. Check the laws and regulations for your specific program.

Product Classification

| | |
|------------------------------|---|
| Regional Availability | Asia Australia/New Zealand EMEA Latin America North America |
| Portfolio | CommScope® |
| Product Type | Hybrid cable, fiber and tone-wire |
| Product Brand | LightScope ZWP® |
| Government Funding | Build America Buy America (BABA) compliant* |

General Specifications


| | |
|-------------------------------------|--------------------|
| Cable Type | Central loose tube |
| Construction Type | Non-armored |
| Subunit Type | Gel-filled |
| Jacket Color | Black |
| Subunit, quantity | 1 |
| Fibers per Subunit, quantity | 4 |
| Tone Wire, quantity | 1 |
| Total Fiber Count | 4 |

Dimensions

| | |
|---------------------------------------|--------------------|
| Height Over Jacket | 4.318 mm 0.17 in |
| Cable Length | 1,524 m 5000 ft |
| Buffer Tube/Subunit Diameter | 3.048 mm 0.12 in |
| Diameter Over Jacket | 9.906 mm 0.39 in |
| Diameter Over Messenger Jacket | 2.032 mm 0.08 in |
| Tone Wire Gauge | 24 AWG |

810010260/50 | O-004-DF-HY-F04NS/8W004 /1X24AWG (5000')

Representative Image

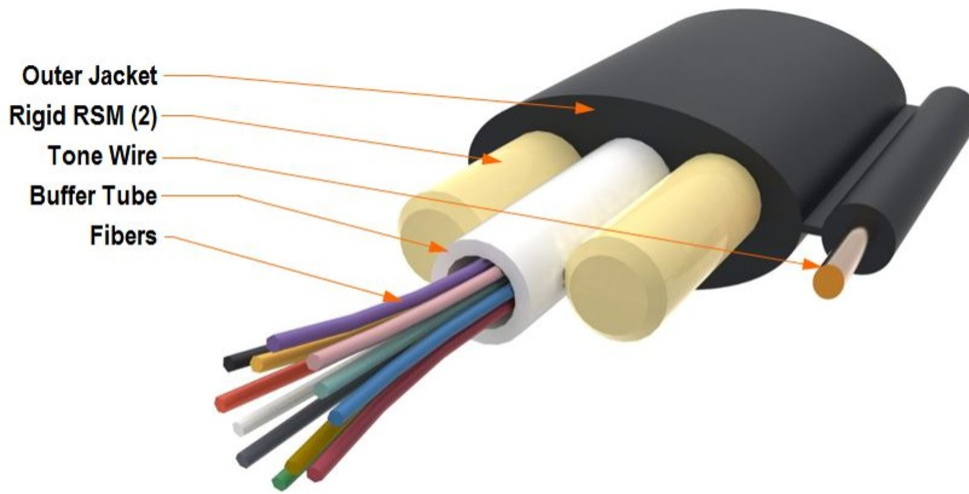

Mechanical Specifications

| | |
|--|---------------------------------------|
| Minimum Bend Radius, loaded | 86.36 mm 3.4 in |
| Minimum Bend Radius, unloaded | 81.28 mm 3.2 in |
| Tensile Load, long term, maximum | 400.34 N 90 lbf |
| Tensile Load, short term, maximum | 1,334.466 N 300 lbf |
| Compression | 1.018 kg/mm 57 lb/in |
| Compression Test Method | FOTP-41 IEC 60794-1 E3 |
| Flex | 35 cycles |
| Flex Test Method | FOTP-104 IEC 60794-1 E6 |
| Impact | 2.17 ft lb 2.942 N-m |
| Impact Test Method | FOTP-25 IEC 60794-1 E4 |
| Strain | See long and short term tensile loads |
| Strain Test Method | FOTP-33 IEC 60794-1 E1 |
| Twist | 10 cycles |
| Twist Test Method | FOTP-85 IEC 60794-1 E7 |
| Vertical Rise, maximum | 889.102 m 2917 ft |

Optical Specifications

| | |
|-------------------|---|
| Fiber Type | G.652.D and G.657.A1 G.652.D and G.657.A1 |
|-------------------|---|

810010260/50 | O-004-DF-HY-F04NS/8W004 /1X24AWG (5000')

Environmental Specifications

| | |
|--------------------------------------|--------------------------------------|
| Installation temperature | -30 °C to +70 °C (-22 °F to +158 °F) |
| Operating Temperature | -40 °C to +70 °C (-40 °F to +158 °F) |
| Storage Temperature | -40 °C to +75 °C (-40 °F to +167 °F) |
| Cable Qualification Standards | ANSI/ICEA S-110-717 |
| Environmental Space | Aerial, lashed Buried |
| Jacket UV Resistance | UV stabilized |
| Water Penetration | 24 h |
| Water Penetration Test Method | FOTP-82 IEC 60794-1 F5 |

Environmental Test Specifications

| | |
|--------------------------------------|--------------------------------------|
| Cable Freeze | -2 °C 28.4 °F |
| Cable Freeze Test Method | FOTP-98 IEC 60794-1 F15 |
| Drip | 70 °C 158 °F |
| Drip Test Method | FOTP-81 IEC 60794-1 E14 |
| Heat Age | -40 °C to +85 °C (-40 °F to +185 °F) |
| Heat Age Test Method | IEC 60794-1 F9 |
| Low High Bend | -30 °C to +60 °C (-22 °F to +140 °F) |
| Low High Bend Test Method | FOTP-37 IEC 60794-1 E11 |
| Temperature Cycle | -40 °C to +70 °C (-40 °F to +158 °F) |
| Temperature Cycle Test Method | FOTP-3 IEC 60794-1 F1 |

Packaging and Weights

| | |
|---------------------|----------------------------|
| Cable weight | 45.984 kg/km 30.9 lb/kft |
|---------------------|----------------------------|

Included Products

DB-8W-LT – LightScope ZWP® Singlemode
Fiber

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable

DB-8W-LT

LightScope ZWP® Singlemode Fiber



Product Classification

| | |
|---------------------|---------------|
| Portfolio | CommScope® |
| Product Type | Optical fiber |

General Specifications

| | |
|--|--|
| Cladding Diameter | 125 µm |
| Cladding Diameter Tolerance | ±0.7 µm |
| Cladding Non-Circularity, maximum | 0.7 % |
| Coating Diameter (Colored) | 249 µm |
| Coating Diameter (Uncolored) | 242 µm |
| Coating Diameter Tolerance (Colored) | ±13 µm |
| Coating Diameter Tolerance (Uncolored) | ±5 µm |
| Coating/Cladding Concentricity Error, maximum | 12 µm |
| Core Diameter | 8.3 µm |
| Core/Clad Offset, maximum | 0.5 µm |
| Proof Test | 689.476 N/mm ² 100000 psi |

Dimensions

| | |
|----------------------------|-----------------|
| Fiber Curl, minimum | 4 m 13.123 ft |
|----------------------------|-----------------|

Mechanical Specifications

| | |
|---|---|
| Macrobending, 20 mm Ø mandrel, 1 turn | 0.75 dB @ 1,550 nm 1.50 dB @ 1,625 nm |
| Macrobending, 30 mm Ø mandrel, 10 turns | 0.25 dB @ 1,550 nm 1.00 dB @ 1,625 nm |
| Macrobending, 60 mm Ø mandrel, 100 turns | 0.05 dB @ 1,550 nm 0.05 dB @ 1,625 nm |
| Coating Strip Force, maximum | 8.9 N 2.001 lbf |

DB-8W-LT

| | |
|---|-------------------|
| Coating Strip Force, minimum | 1.3 N 0.292 lbf |
| Dynamic Fatigue Parameter, minimum | 20 |

Optical Specifications

| | |
|--|---------------------|
| Cabled Cutoff Wavelength, maximum | 1260 nm |
| Point Defects, maximum | 0.1 dB |
| Zero Dispersion Slope, maximum | 0.092 ps/[km-nm-nm] |
| Zero Dispersion Wavelength, maximum | 1324 nm |
| Zero Dispersion Wavelength, minimum | 1300 nm |

Optical Specifications, Wavelength Specific

| | |
|--|---|
| Attenuation, maximum | 0.22 dB/km @ 1,550 nm 0.25 dB/km @ 1,490 nm 0.25 dB/km @ 1,625 nm 0.36 dB/km @ 1,310 nm 0.36 dB/km @ 1,385 nm |
| Attenuation, typical | 0.19 dB/km @ 1,550 nm 0.33 dB/km @ 1,310 nm |
| Backscatter Coefficient | -79.6 dB @ 1,310 nm -82.1 dB @ 1,550 nm |
| Dispersion, maximum | 18 ps(nm-km) at 1550 nm 3.5 ps(nm-km) from 1285 nm to 1330 nm at 1310 nm |
| Index of Refraction | 1.467 @ 1,310 nm 1.467 @ 1,385 nm 1.468 @ 1,550 nm |
| Mode Field Diameter | 10.4 μm @ 1,550 nm 9.2 μm @ 1,310 nm 9.6 μm @ 1,385 nm |
| Mode Field Diameter Tolerance | $\pm 0.4 \mu\text{m}$ @ 1310 nm $\pm 0.5 \mu\text{m}$ @ 1550 nm $\pm 0.6 \mu\text{m}$ @ 1385 nm |
| Polarization Mode Dispersion Link Design Value, maximum | 0.04 ps/sqrt(km) |
| Standards Compliance | ITU-T G.652.D ITU-T G.657.A1 |

Environmental Specifications

| | |
|--|--------------------|
| Heat Aging, maximum | 0.05 dB/km @ 85 °C |
| Temperature Dependence, maximum | 0.05 dB/km |
| Temperature Humidity Cycling, maximum | 0.05 dB/km |
| Water Immersion, maximum | 0.05 dB/km @ 23 °C |

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |

DB-8W-LT



* Footnotes

- Temperature Dependence, maximum** Temperature dependence is conducted at -60 °C to +85 °C (-76 °F to +185 °F)
- Temperature Humidity Cycling, maximum** Temperature humidity cycling is conducted at -10 °C to +85 °C (+14 °F to +185 °F) up to 95% relative humidity