

Fiber outdoor drop cable, LightScope ZWP® Self-Supporting All-Dielectric, Singlemode G.652.D and G.657.A1, 6 fiber Arid Core construction, Gel-filled, central loose tube, no ripcords, Feet jacket marking, Black jacket color

## Product Classification

|                              |   |
|------------------------------|---|
| <b>Regional Availability</b> | Asia   Australia/New Zealand   EMEA   Latin America   North America |
| <b>Portfolio</b>             | CommScope®  |
| <b>Product Type</b>          | Fiber drop cable  |
| <b>Product Series</b>        | O-DF  |


## General Specifications

|                                     |   |
|-------------------------------------|---|
| <b>Cable Type</b>                   | Central loose tube  |
| <b>Construction Type</b>            | Non-armored   |
| <b>Subunit Type</b>                 | Gel-filled  |
| <b>Jacket Color</b>                 | Black   |
| <b>Jacket Marking</b>               | Feet  |
| <b>Jacket Marking Method</b>        | Inkjet  |
| <b>Jacket Marking Text</b>          | COMMSCOPE OPTICAL CABLE OS2 SM 6F (SERIAL NUMBER) MM /YYYY (HANDSET SYMBOL) XXXXXX FT |
| <b>Subunit, quantity</b>            | 1   |
| <b>Fibers per Subunit, quantity</b> | 6   |
| <b>Total Fiber Count</b>            | 6   |

## Dimensions

|                                     |                   |
|-------------------------------------|-------------------|
| <b>Height Over Jacket</b>           | 4.3 mm   0.169 in |
| <b>Buffer Tube/Subunit Diameter</b> | 2 mm   0.079 in   |
| <b>Diameter Over Jacket</b>         | 8 mm   0.315 in   |

## Representative Image

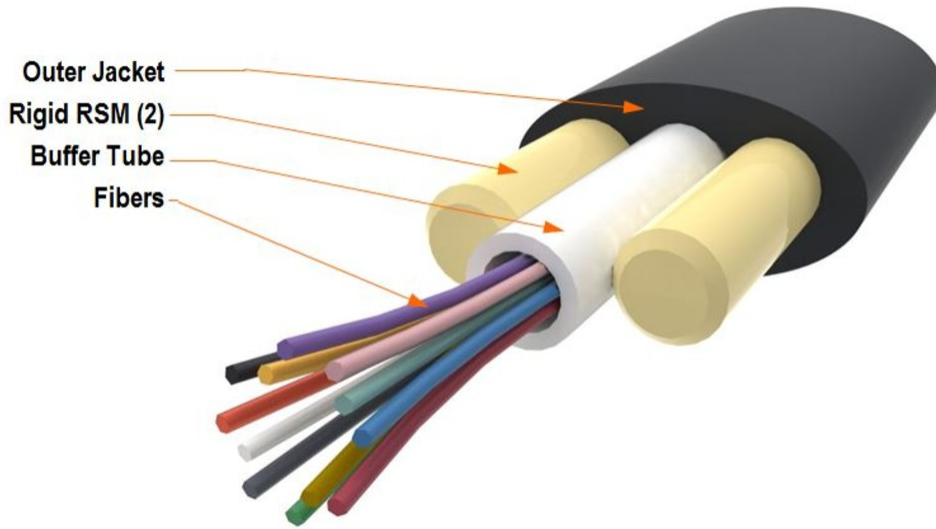

## Material Specifications

**Jacket Material** PE

## Mechanical Specifications

|  |                                       |
|--|---------------------------------------|
| <b>Minimum Bend Radius, loaded</b>       | 86 mm   3.386 in                      |
| <b>Minimum Bend Radius, unloaded</b>     | 81 mm   3.189 in                      |
| <b>Tensile Load, long term, maximum</b>  | 400 N   89.924 lbf                    |
| <b>Tensile Load, short term, maximum</b> | 1334 N   299.895 lbf                  |
| <b>Compression</b>                       | 10 N/mm   57.101 lb/in                |
| <b>Compression Test Method</b>           | FOTP-41   IEC 60794-1 E3              |
| <b>Flex</b>                              | 35 cycles                             |
| <b>Flex Test Method</b>                  | FOTP-104   IEC 60794-1 E6             |
| <b>Impact</b>                            | 2.94 N-m   26.021 in lb               |
| <b>Impact Test Method</b>                | FOTP-25   IEC 60794-1 E4              |
| <b>Strain</b>                            | See long and short term tensile loads |
| <b>Strain Test Method</b>                | FOTP-33   IEC 60794-1 E1              |
| <b>Twist</b>                             | 10 cycles                             |
| <b>Twist Test Method</b>                 | FOTP-85   IEC 60794-1 E7              |
| <b>Vertical Rise, maximum</b>            | 1047 m   3,435.039 ft                 |

## Optical Specifications

**Fiber Type** G.652.D and G.657.A1 | G.652.D and G.657.A1

## Environmental Specifications

**Installation temperature** -30 °C to +70 °C (-22 °F to +158 °F)

**Operating Temperature** -40 °C to +70 °C (-40 °F to +158 °F)

**Storage Temperature** -40 °C to +75 °C (-40 °F to +167 °F)

**Cable Qualification Standards** ANSI/ICEA S-110-717

**Environmental Space** Aerial, self-support | Buried

**Jacket UV Resistance** UV stabilized

**Water Penetration** 24 h

**Water Penetration Test Method** FOTP-82 | IEC 60794-1 F5

## Environmental Test Specifications

**Cable Freeze** -2 °C | 28.4 °F

**Cable Freeze Test Method** FOTP-98 | IEC 60794-1 F15

**Drip** 70 °C | 158 °F

**Drip Test Method** FOTP-81 | IEC 60794-1 E14

**Heat Age** -40 °C to +85 °C (-40 °F to +185 °F)

**Heat Age Test Method** IEC 60794-1 F9

**Low High Bend** -30 °C to +60 °C (-22 °F to +140 °F)

**Low High Bend Test Method** FOTP-37 | IEC 60794-1 E11

**Temperature Cycle** -40 °C to +70 °C (-40 °F to +158 °F)

**Temperature Cycle Test Method** FOTP-3 | IEC 60794-1 F1

## Packaging and Weights

**Cable weight** 39 kg/km | 26.207 lb/kft

## Regulatory Compliance/Certifications

| Agency        | Classification   |
|---------------|--|
| CHINA-ROHS    | Below maximum concentration value  |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system   |
| REACH-SVHC    | Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a> |
| ROHS          | Compliant  |

UK-ROHS

Compliant



## Included Products

CS-8W-250-EMEA – LightScope ZWP® Singlemode Fiber  
250um

## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable

## LightScope ZWP® Singlemode Fiber



### Product Classification

|                     |               |
|---------------------|---------------|
| <b>Portfolio</b>    | CommScope®    |
| <b>Product Type</b> | Optical fiber |

### General Specifications

|  |  |
|--|--|
| <b>Cladding Diameter</b>                             | 125 µm                                 |
| <b>Cladding Diameter Tolerance</b>                   | ±0.7 µm                                |
| <b>Cladding Non-Circularity, maximum</b>             | 0.7 %                                  |
| <b>Coating Diameter (Colored)</b>                    | 249 µm                                 |
| <b>Coating Diameter (Uncolored)</b>                  | 242 µm                                 |
| <b>Coating Diameter Tolerance (Colored)</b>          | ±13 µm                                 |
| <b>Coating Diameter Tolerance (Uncolored)</b>        | ±5 µm                                  |
| <b>Coating/Cladding Concentricity Error, maximum</b> | 12 µm                                  |
| <b>Core/Clad Offset, maximum</b>                     | 0.5 µm                                 |
| <b>Proof Test</b>                                    | 689.476 N/mm <sup>2</sup>   100000 psi |

### Dimensions

|                            |                 |
|----------------------------|-----------------|
| <b>Fiber Curl, minimum</b> | 4 m   13.123 ft |
|----------------------------|-----------------|

### Mechanical Specifications

|   |   |
|---|---|
| <b>Macrobending, 20 mm Ø mandrel, 1 turn</b>    | 0.75 dB @ 1,550 nm   1.50 dB @ 1,625 nm |
| <b>Macrobending, 30 mm Ø mandrel, 10 turns</b>  | 0.25 dB @ 1,550 nm   1.00 dB @ 1,625 nm |
| <b>Macrobending, 60 mm Ø mandrel, 100 turns</b> | 0.05 dB @ 1,550 nm   0.05 dB @ 1,625 nm |
| <b>Coating Strip Force, maximum</b>             | 8.9 N   2.001 lbf                       |
| <b>Coating Strip Force, minimum</b>             | 1.3 N   0.292 lbf                       |

# CS-8W-250-EMEA | 250um

**Dynamic Fatigue Parameter, minimum** 20

## Optical Specifications

**Cabled Cutoff Wavelength, maximum** 1250 nm

**Point Defects, maximum** 0.05 dB

**Zero Dispersion Slope, maximum** 0.092 ps/[km-nm-nm]

**Zero Dispersion Wavelength, maximum** 1324 nm

**Zero Dispersion Wavelength, minimum** 1300 nm

## Optical Specifications, Wavelength Specific

**Attenuation, maximum** 0.21 dB/km @ 1,550 nm | 0.24 dB/km @ 1625 nm | 0.25 dB/km @ 1,490 nm | 0.35 dB/km @ 1,310 nm | 0.35 dB/km @ 1,385 nm

**Dispersion, maximum** 18 ps(nm-km) at 1550 nm | 2.2 ps(nm-km) at 1625 nm | 3.5 ps(nm-km) from 1285 nm to 1330 nm at 1310 nm

**Index of Refraction** 1.467 @ 1,310 nm | 1.468 @ 1,550 nm

**Mode Field Diameter** 10.4  $\mu\text{m}$  @ 1,550 nm | 9.2  $\mu\text{m}$  @ 1,310 nm

**Mode Field Diameter Tolerance**  $\pm 0.4 \mu\text{m}$  @ 1310 nm |  $\pm 0.5 \mu\text{m}$  @ 1550 nm

**Polarization Mode Dispersion Link Design Value, maximum** 0.06 ps/sqrt(km)

**Standards Compliance** ITU-T G.652.D | ITU-T G.657.A1

## Environmental Specifications

**Heat Aging, maximum** 0.05 dB/km @ 85 °C

**Temperature Dependence, maximum** 0.05 dB/km

**Temperature Humidity Cycling, maximum** 0.05 dB/km

**Water Immersion, maximum** 0.05 dB/km @ 23 °C

## \* Footnotes

**Temperature Dependence, maximum** Temperature dependence is conducted at -60 °C to +85 °C (-76 °F to +185 °F)

**Temperature Humidity Cycling, maximum** Temperature humidity cycling is conducted at -10 °C to +85 °C (+14 °F to +185 °F) up to 95% relative humidity