

Fiber indoor cable, LazrSPEED® Plenum Light Duty Interconnect Cordage, 2 fiber, Multimode OM4, Meters jacket marking, Aqua jacket color

## Product Classification

<b>Regional Availability</b>	Australia/New Zealand   EMEA   Latin America   Middle East/Africa   North America
<b>Portfolio</b>	CommScope®
<b>Product Type</b>	Fiber indoor cable
<b>Product Series</b>	P-DU


## General Specifications

<b>Cable Type</b>	MPO trunk cable
<b>Construction Type</b>	Non-armored
<b>Fiber Type, quantity</b>	2
<b>Jacket Color</b>	Aqua
<b>Jacket Marking</b>	Meters
<b>Subunit Type</b>	Gel-free
<b>Total Fiber Count</b>	2

## Dimensions

<b>Diameter Over Jacket</b>	1.5 mm   0.059 in
-----------------------------	-------------------

## Representative Image

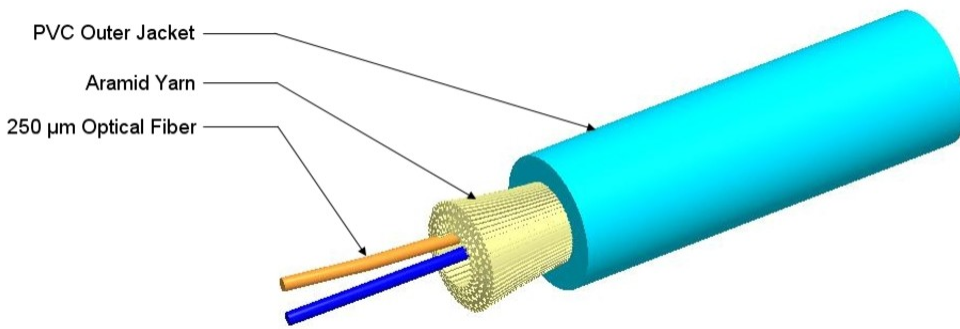

## Mechanical Specifications

<b>Minimum Bend Radius, loaded</b>	30 mm   1.181 in
<b>Minimum Bend Radius, unloaded</b>	20 mm   0.787 in
<b>Tensile Load, long term, maximum</b>	30 N   6.744 lbf
<b>Tensile Load, short term, maximum</b>	100 N   22.481 lbf
<b>Compression</b>	4 N/mm   22.841 lb/in
<b>Compression Test Method</b>	FOTP-41   IEC 60794-1 E3
<b>Impact</b>	0.74 N-m   6.55 in lb
<b>Impact Test Method</b>	FOTP-25   IEC 60794-1 E4
<b>Strain</b>	See long and short term tensile loads
<b>Strain Test Method</b>	FOTP-33   IEC 60794-1 E1
<b>Twist</b>	10 cycles
<b>Twist Test Method</b>	FOTP-85   IEC 60794-1 E7

## Optical Specifications

<b>Fiber Type</b>	OM4, LazrSPEED®
-------------------	-----------------

## Environmental Specifications

<b>Installation temperature</b>	0 °C to +70 °C (+32 °F to +158 °F)
<b>Operating Temperature</b>	0 °C to +70 °C (+32 °F to +158 °F)
<b>Storage Temperature</b>	-40 °C to +70 °C (-40 °F to +158 °F)
<b>Cable Qualification Standards</b>	Telcordia GR-409
<b>Environmental Space</b>	Plenum
<b>Flame Test Listing</b>	NEC OFNP (ETL) and c(ETL)

**Flame Test Method** NFPA 130 | NFPA 262

## Environmental Test Specifications

**Heat Age** 0 °C to +85 °C (+32 °F to +185 °F)

**Heat Age Test Method** IEC 60794-1 F9

**Low High Bend** 0 °C to +70 °C (+32 °F to +158 °F)

**Low High Bend Test Method** FOTP-37 | IEC 60794-1 E11

**Temperature Cycle** 0 °C to +70 °C (+32 °F to +158 °F)

**Temperature Cycle Test Method** FOTP-3 | IEC 60794-1 F1

## Packaging and Weights

**Cable weight** 2.2 kg/km | 1.478 lb/kft

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant



## Included Products

CS-5G-MP – LazrSPEED® OM5 WideBand Multimode Fiber

## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable