



Empty CMC8S 2x 300W HVAC Outdoor Equipment Cabinet

The cabinet is designed to house rack mounted equipment. This includes DC power systems, Fiber storage/splice trays, cell site routers, batteries, and other rack mounted equipment. This cabinet provides mechanical and environmental protection for the equipment inside.

- Excellent Thermal Performance with a HVAC
- Provides mounting space for power distribution, network servers, batteries, or other equipment.
- Front door compatible with Pad Lock.
- Provides flexible access for the cable entrances.
- Two built-in 300w heaters for cold environments.
- Optional battery tray (Integration Program only)
- Provides 8RU of 19" Rack Space for Equipment
- Common parts available across the same platform.
- Additional options available through our Integration Program - For more information, consult local sales manager for details

Product Classification

Regional Availability	Latin America North America
Product Type	Micro cell site enclosure
Product Series	CMC
Warranty	For more information, please consult our Product Warranty guidelines

General Specifications

Access	Front door Removable panel
Accessories	Grips
Alarm Type	Door alarm HVAC alarms (including high temperature, failure) S2 module, 20P or standard and user defined alarms
Batteries	Not included
Batteries Supported	3
Closure Sealing Type	Hinged with lock
Color	Light Gray (RAL 7035)

S8B0-D1-A00D00-01 | CMC85

Cooling	Direct air cooling Up to 2x 300W HVAC
Door Security	Hasp and staple Quarter turn lock, puck lock system for rear door
Door Type, front	Hinged Turn latch
Door, quantity	2
Electronics Bay, quantity	1
Grounding Connection	Standard
Lock Type	Key lock for front door
Mounting	H-frame Pad Plinth Universal pole mount Universal wall mount
Noise Emission, maximum	65 dBA
Power Supply Compatibility	6302
Rack Type	EIA 19 in
Rack Units	8

Dimensions


Height	635 mm 25 in
Width	609.6 mm 24 in
Width, Battery	0 mm 0 in
Width, Battery Compartment	0 mm 0 in
Depth	762 mm 30 in
Depth, without door	609.6 mm 24 in
Electronics Bay Height, each	355.6 mm 14 in

Electrical Specifications

Alarm Output	Dry contacts
Battery String Current, maximum	100 A-h @ -48 Vdc
Battery Strings, quantity	1 @ -48 Vdc
Cooling Capacity	600 W
dc Distribution Type	19" Rack DC Distribution Panels or DIN Breakers
Generator Connection	No connection
Voltage	-48 Vdc

Cabinet Dimensions and Door Clearances

S8B0-D1-A00D00-01 | CMC85

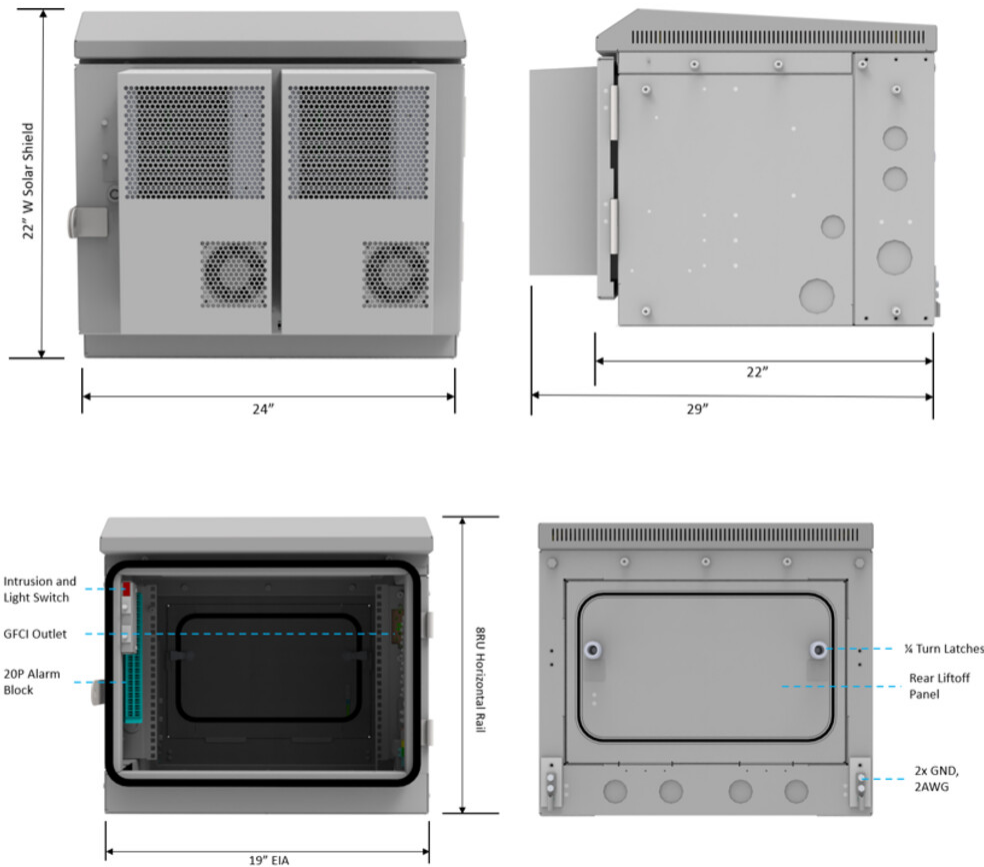

Material Specifications

Finish	Powder coated UV resistant
Material Type	Aluminum

Environmental Specifications

Operating Temperature	-40 °C to +46 °C (-40 °F to +115 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Environmental Space	Above ground Outdoor UV resistant for outdoor Wireless installation
Qualification Standards	GR-3108 class 4 IP55 NEMA, Type 4 Telcordia GR-1089-CORE Telcordia GR-487 UL/ETL Type 3R
Safety Standard	UL cUL
Thermal Compliance	GR-487

Packaging and Weights

Packaging quantity 1
Weight, net 103.419 kg | 228 lb

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

* Footnotes

Warranty For more information, please consult our Product Warranty guidelines