


# 2NN2H4-33B-R6B



24-Port antenna, 8 x 698-896 MHz, 16 x 1710-2400 MHz, 33° HPBW, 6 x RETs, 4x SBTs, 6ft Length

- Provides 4 ports per beam for low band and 8 ports per beam for mid band
- Twin beam patterns are optimized for minimum beam crossover providing for improved 4G and 5G data throughput

## General Specifications

<b>Antenna Type</b>	Multibeam
<b>Band</b>	Multiband
<b>Color</b>	Light Gray (RAL 7035)
<b>Grounding Type</b>	RF connector inner conductor and body grounded to reflector and mounting bracket
<b>Performance Note</b>	Outdoor usage
<b>Radome Material</b>	Fiberglass, UV resistant
<b>Radiator Material</b>	Low loss circuit board
<b>Reflector Material</b>	Aluminum
<b>RF Connector Interface</b>	4.3-10 Female
<b>RF Connector Location</b>	Bottom
<b>RF Connector Quantity, high band</b>	0
<b>RF Connector Quantity, mid band</b>	16
<b>RF Connector Quantity, low band</b>	8
<b>RF Connector Quantity, total</b>	24

## Remote Electrical Tilt (RET) Information

<b>RET Hardware</b>	CommRET v2
<b>RET Interface</b>	8-pin DIN Female   8-pin DIN Male
<b>RET Interface, quantity</b>	4 female   4 male
<b>Input Voltage</b>	10-30 Vdc
<b>Internal Bias Tee</b>	Port 1   Port 17   Port 5   Port 9
<b>Internal RET</b>	Low band (2)   Mid band (4)
<b>Power Consumption, active state, maximum</b>	10 W
<b>Power Consumption, idle state, maximum</b>	2 W

# 2NN2H4-33B-R6B

**Protocol** 3GPP/AISG 2.0 (Multi-RET)

## Dimensions



**Width** 640 mm | 25.197 in

**Depth** 235 mm | 9.252 in

**Length** 1828 mm | 71.969 in

**Net Weight, antenna only** 59.5 kg | 131.175 lb

## Array Layout

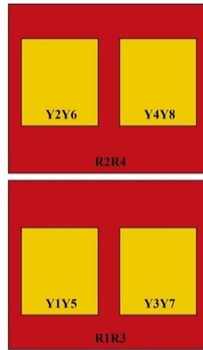


Array ID	Frequency (MHz)	RF Connector	RET (SBET)	AISG No.	SBT RF PORT	SBT No.	RET UID
R1	698-896	1 - 2	1	AISG1	1	1	CPXXXXXXXXXXXXR1
R2	698-896	3 - 4					CPXXXXXXXXXXXXR3
R3	698-896	5 - 6					CPXXXXXXXXXXXXR3
R4	698-896	7 - 8					CPXXXXXXXXXXXXR3
Y1	1710-2400	9 - 10	3	AISG3	9	3	CPXXXXXXXXXXXXY1
Y2	1710-2400	11 - 12					CPXXXXXXXXXXXXY3
Y3	1710-2400	13 - 14	4	AISG3			CPXXXXXXXXXXXXY3
Y4	1710-2400	15 - 16					CPXXXXXXXXXXXXY5
Y5	1710-2400	17 - 18	5	AISG4	17	4	CPXXXXXXXXXXXXY5
Y6	1710-2400	19 - 20					CPXXXXXXXXXXXXY7
Y7	1710-2400	21 - 22	6	AISG4			CPXXXXXXXXXXXXY7
Y8	1710-2400	23 - 24					CPXXXXXXXXXXXXY7

(Sizes of colored boxes are not true depictions of array sizes)

## Port Configuration

# 2NN2H4-33B-R6B

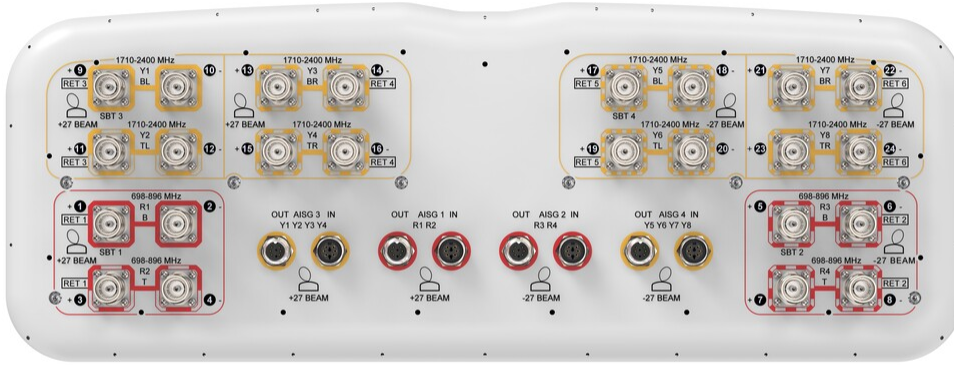

## Electrical Specifications

<b>Impedance</b>	50 ohm
<b>Operating Frequency Band</b>	1710 – 2400 MHz   698 – 896 MHz
<b>Polarization</b>	±45°
<b>Total Input Power, maximum</b>	2,000 W @ 50 °C

## Electrical Specifications

	R1-R4	R1-R4	Y1-Y8	Y1-Y8	Y1-Y8	Y1-Y8
Frequency Band, MHz	698–806	824–896	1710–1880	1850–1990	1920–2200	2300–2400
<b>RF Port</b>	1-8	1-8	9-24	9-24	9-24	9-24
<b>Gain, dBi</b>	14	14.6	16.2	17.1	17.9	18.4
<b>Beam Centers, Horizontal, degrees</b>	±27	±27	±27	±27	±27	±27
<b>Beamwidth, Horizontal, degrees</b>	41	37	34	33	30	28
<b>Beamwidth, Vertical, degrees</b>	25	22.4	10.2	9.3	8.7	7.7
<b>Beam Tilt, degrees</b>	2–20	2–20	2–12	2–12	2–12	2–12
<b>USLS (First Lobe), dB</b>	16	18	15	16	16	16

# 2NN2H4-33B-R6B

<b>Front-to-Back Ratio at 180°, dB</b>	27	30	31	34	32	32
<b>Isolation, Cross Polarization, dB</b>	25	25	25	25	25	25
<b>Isolation, Inter-band, dB</b>	25	25	25	25	25	25
<b>VSWR   Return loss, dB</b>	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
<b>PIM, 3rd Order, 2 x 20 W, dBc</b>	-153	-153	-153	-153	-153	-153
<b>Input Power per Port at 50°C, maximum, watts</b>	300	300	250	250	250	250

## Mechanical Specifications

<b>Wind Loading @ Velocity, frontal</b>	715.0 N @ 150 km/h (160.7 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, lateral</b>	206.0 N @ 150 km/h (46.3 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, maximum</b>	911.0 N @ 150 km/h (204.8 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, rear</b>	446.0 N @ 150 km/h (100.3 lbf @ 150 km/h)
<b>Wind Speed, maximum</b>	241 km/h (150 mph)

## Packaging and Weights

<b>Width, packed</b>	752 mm   29.606 in
<b>Depth, packed</b>	387 mm   15.236 in
<b>Length, packed</b>	1982 mm   78.032 in
<b>Weight, gross</b>	80 kg   176.37 lb

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



## Included Products

- BSAMNT-4 – Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
- BSAMNT-M4 – Middle Downtilt Mounting Kit for Long Antennas for 2.4 - 4.5 in (60 - 115 mm) OD round

# 2NN2H4-33B-R6B

---

members. Kit contains one scissor bracket set.

## \* Footnotes

### **Performance Note**

Severe environmental conditions may degrade optimum performance