5-1427070-4 | CS30Z3 GRY C6 4/24 U/UTP RIB 305M ANATEL



Category 6 U/UTP Cable, 24AWG, low smoke zero halogen, gray jacket, 4 pair count, 305 m length Reel in box

Product Classification

 Regional Availability
 Latin America

 Portfolio
 NETCONNECT®

 Product Type
 Twisted pair cable

General Specifications

Product Number CS30Z3

ANSI/TIA Category 6

Cable Component Type Horizontal

 Cable Type
 U/UTP (unshielded)

Conductor Type, singlesSolidConductors, quantity8Jacket ColorGrayPairs, quantity4

Separator Type Isolator

Transmission Standards ABNT/NBR 14703 | ANSI/TIA-568.2-D | Anatel

Dimensions


Cable Length304.8 m | 1000 ftDiameter Over Insulated Conductor0.978 mm | 0.038 inDiameter Over Jacket, nominal5.588 mm | 0.22 in

Conductor Gauge, singles 24 AWG

Cross Section Drawing



5-1427070-4 | CS30Z3 GRY C6 4/24 U/UTP RIB 305M ANATEL

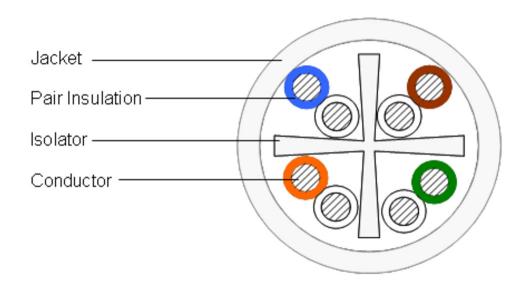

Electrical Specifications

Characteristic Impedance100 ohmCharacteristic Impedance Tolerance±15 ohmNominal Velocity of Propagation (NVP)68 %Operating Voltage, maximum80 V

Remote Powering Fully complies with the recommendations set forth by IEEE 802.3bt (Type 4) for the

safe delivery of power over LAN cable when installed according to ISO/IEC 14763-2, CENELEC EN 50174-1, CENELEC EN 50174-2 or TIA TSB-184-A

Material Specifications

Conductor MaterialBare copperInsulation MaterialPolyolefin

Jacket Material Low Smoke Zero Halogen (LSZH)

Separator Material Polyolefin

Environmental Specifications

Installation temperature $0 \, ^{\circ}\text{C} \, \text{to} +60 \, ^{\circ}\text{C} \, (+32 \, ^{\circ}\text{F to} +140 \, ^{\circ}\text{F})$ Operating Temperature $-20 \, ^{\circ}\text{C} \, \text{to} +60 \, ^{\circ}\text{C} \, (-4 \, ^{\circ}\text{F to} +140 \, ^{\circ}\text{F})$

Acid Gas Test Method IEC 60754-2

Environmental Space Low Smoke Zero Halogen (LSZH)

Flame Test Method ABNT/NBR 14705 | IEC 60332-3-22

Page 2 of 3

5-1427070-4 | CS30Z3 GRY C6 4/24 U/UTP RIB 305M ANATEL

Smoke Test Method IEC 61034-2

Packaging and Weights

Packaging Type Reel in box

Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Below maximum concentration value

REACH-SVHC Compliant as per SVHC revision on www.commscope.com/ProductCompliance

ROHS Compliant UK-ROHS Compliant

