


U3GRXUC8H

Base Product

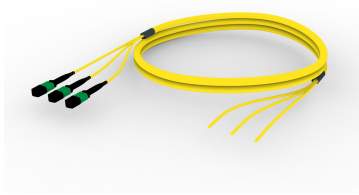

Ultra Low Loss (ULL) Singlemode G.657.A2 MPO16 (Pinned) to Unconnectorized, Fiber Trunk Cable Assembly, 48-Fiber, LSZH B2ca

Product Classification

| | |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Regional Availability | Europe |
| Portfolio | CommScope® |
| Product Type | Fiber trunk cable assembly |
| Product Brand | Propel SYSTIMAX ULL |
| Ordering Note | For additional jacket colors, please contact a CommScope Sales Representative For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration |

General Specifications


| | |
|-------------------------------------|-------------------------|
| Connector A, quantity | 3 |
| Color, boot A | Black |
| Color, connector A | Green |
| Connector B, quantity | 0 |
| Construction Type | Stranded |
| Furcation Color | Yellow |
| Interface, Connector A | MPO-16/APC Male |
| Interface, Connector B | Unterminated |
| Jacket Color | Yellow |
| Polarity | Method B Enhanced (ULL) |
| Fibers per Subunit, quantity | 16 |
| Total Fibers, quantity | 48 |

Dimensions

| | |
|-----------------------------------------|----------|
| Breakout Length | 22 in |
| Cable Assembly Length Range (m) | 3 – 305 |
| Cable Assembly Length Range (ft) | 10 – 999 |

U3GRXUC8H

Ordering Tree

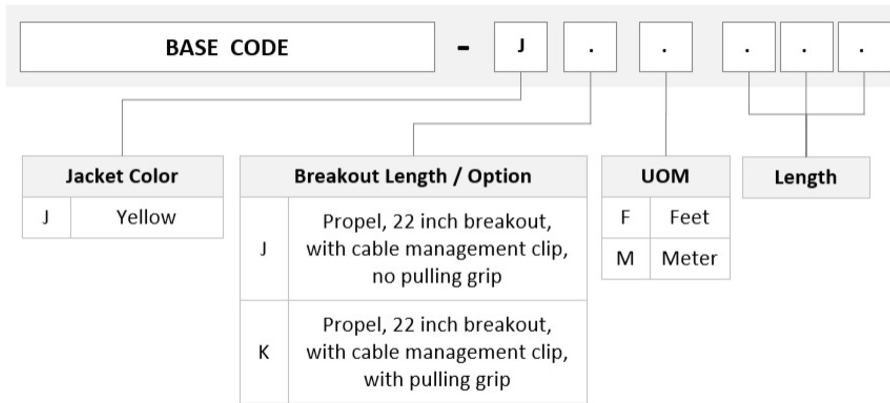

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0° | 4.40 lb @ 90°

Optical Specifications

Fiber Mode Singlemode

Fiber Type G.657.A2, TeraSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

EN50575 CPR Cable EuroClass Fire Performance B2ca

Environmental Space Indoor | Low Smoke Zero Halogen (LSZH)

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--------------------------------------------------------------------------------|
| CHINA-ROHS | Above maximum concentration value |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| ROHS | Compliant/Exempted |
| UK-ROHS | Compliant/Exempted |



U3GRXUC8H

Included Products

- 760251075
N-048-MP-8G1-F16YL/30T/B2 – Fiber indoor cable, TeraSPEED® Low Smoke Zero Halogen Riser MPO Trunk, 48 fiber with 16-fiber, 3.0 mm subunits, Singlemode G.657.A2/B2, Feet jacket marking, Yellow jacket color, B2ca flame rating
- 860661398 – Fiber Optic Connector Kit, singlemode, OS2, MPO-16/APC, ULL, pinned, green, for 3 mm cable

760251075 | N-048-MP-8G1-F16YL/30T/B2



Fiber indoor cable, TeraSPEED® Low Smoke Zero Halogen Riser MPO Trunk, 48 fiber with 16-fiber, 3.0 mm subunits, Singlemode G.657.A2/B2, Feet jacket marking, Yellow jacket color, B2ca flame rating

Product Classification

| | |
|------------------------------|---------------------------------------------------------------------|
| Regional Availability | Asia Australia/New Zealand EMEA Latin America North America |
| Portfolio | CommScope® |
| Product Type | Fiber indoor cable |
| Product Series | N-MP |

General Specifications

| | |
|-------------------------------------|-----------------|
| Cable Type | MPO trunk cable |
| Construction Type | Non-armored |
| Subunit Type | Gel-free |
| Filler, quantity | 1 |
| Jacket Color | Yellow |
| Jacket Marking | Feet |
| Subunit, quantity | 3 |
| Fibers per Subunit, quantity | 16 |
| Total Fiber Count | 48 |

Dimensions

| | |
|-------------------------------------|--------------------|
| Buffer Tube/Subunit Diameter | 3 mm 0.118 in |
| Diameter Over Jacket | 10.6 mm 0.417 in |

Representative Image



Mechanical Specifications

| | |
|------------------------------------------|---------------------------------------|
| Minimum Bend Radius, loaded | 159 mm 6.26 in |
| Minimum Bend Radius, unloaded | 106 mm 4.173 in |
| Tensile Load, long term, maximum | 400 N 89.924 lbf |
| Tensile Load, short term, maximum | 1335 N 300.12 lbf |
| Compression | 10 N/mm 57.101 lb/in |
| Compression Test Method | FOTP-41 IEC 60794-1 E3 |
| Flex | 25 cycles |
| Flex Test Method | FOTP-104 IEC 60794-1 E6 |
| Impact | 2.94 N-m 26.021 in lb |
| Impact Test Method | FOTP-25 IEC 60794-1 E4 |
| Strain | See long and short term tensile loads |
| Strain Test Method | FOTP-33 IEC 60794-1 E1 |
| Twist | 10 cycles |
| Twist Test Method | FOTP-85 IEC 60794-1 E7 |
| Vertical Rise, maximum | 404 m 1,325.459 ft |

Optical Specifications

| | |
|-------------------|-------------|
| Fiber Type | G.657.A2/B2 |
|-------------------|-------------|

Environmental Specifications

| | |
|---------------------------------|------------------------------------|
| Installation temperature | 0 °C to +50 °C (+32 °F to +122 °F) |
| Operating Temperature | 0 °C to +60 °C (+32 °F to +140 °F) |

760251075 | N-048-MP-8G1-F16YL/30T/B2

| | |
|-----------------------------------------------------|---------------------------------------|
| Storage Temperature | -40 °C to +60 °C (-40 °F to +140 °F) |
| Cable Qualification Standards | ANSI/ICEA S-83-596 Telcordia GR-409 |
| EN50575 CPR Cable EuroClass Fire Performance | B2ca |
| EN50575 CPR Cable EuroClass Smoke Rating | s1a |
| EN50575 CPR Cable EuroClass Droplets Rating | d2 |
| EN50575 CPR Cable EuroClass Acidity Rating | a1 |
| Environmental Space | Low Smoke Zero Halogen (LSZH) |
| Flame Test Method | IEC 60754-2 IEC 61034-2 |

Environmental Test Specifications

| | |
|--------------------------------------|------------------------------------|
| Heat Age | 0 °C to +85 °C (+32 °F to +185 °F) |
| Heat Age Test Method | IEC 60794-1 F9 |
| Low High Bend | 0 °C to +70 °C (+32 °F to +158 °F) |
| Low High Bend Test Method | FOTP-37 IEC 60794-1 E11 |
| Temperature Cycle | 0 °C to +70 °C (+32 °F to +158 °F) |
| Temperature Cycle Test Method | FOTP-3 IEC 60794-1 F1 |

Packaging and Weights

| | |
|---------------------|---------------------------|
| Cable weight | 101 kg/km 67.869 lb/kft |
|---------------------|---------------------------|

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable

860661398



Fiber Optic Connector Kit, singlemode, OS2, MPO-16/APC, ULL, pinned, green, for 3 mm cable

Product Classification

| | |
|------------------------------|---------------------------------------------------------------------|
| Regional Availability | Asia Australia/New Zealand EMEA Latin America North America |
| Portfolio | CommScope® |
| Product Type | Fiber connector |

General Specifications

| | |
|--------------------------|--------------|
| Color | Green |
| Color, boot | Black |
| Ferrule Geometry | Angled |
| Interface | MPO/APC Male |
| Interface Feature | Pinned |

Dimensions

| | |
|----------------------------------|-----------------|
| Compatible Cable Diameter | 3 mm 0.118 in |
|----------------------------------|-----------------|

Optical Specifications

| | |
|--------------------------------|------------|
| Fiber Mode | Singlemode |
| Fiber Type | OS2 |
| Insertion Loss, maximum | 0.3 dB |
| Return Loss, minimum | 65 dB |

Packaging and Weights

| | |
|---------------------------|---|
| Packaging quantity | 1 |
|---------------------------|---|

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--------------------------------------------------------------------------------|
| CHINA-ROHS | Below maximum concentration value |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |

860661398

| | |
|------------|--------------------------------------------------------------------------------------------------------------------------------|
| REACH-SVHC | Compliant as per SVHC revision on www.commscope.com/ProductCompliance |
| ROHS | Compliant |
| UK-ROHS | Compliant |

