UQVRZRZ7R

Base Product



Ultra Low Loss (ULL) OM5 MPO16 APC (Pinned) to MPO16 APC (Pinned), Fiber Array Cable Assembly, 16-Fiber, Plenum

Product Classification

Regional Availability

Asia | Australia/New Zealand | China | Europe | India | Latin

America | Middle East/Africa | North America

Portfolio CommScope®

 Product Type
 Fiber array cable assembly

 Product Brand
 Propel | SYSTIMAX ULL

Ordering Note For additional jacket colors, please contact a CommScope Sales Representative | For

lengths greater than 999 ft (304 m), orders must be in meters | Minimum length may

vary based on cable configuration

General Specifications

Connector A, quantity

Color, boot ABlackColor, connector AGreen

Connector B, quantity

Color, boot BBlackColor, connector BGreenConstruction TypeStrandedFurcation ColorLime green

Interface, Connector A MPO-16/APC Male
Interface, Connector B MPO-16/APC Male

Jacket Color Lime green

Polarity Method B Enhanced (ULL)

Fibers per Subunit, quantity 16

Total Fibers, quantity 16

Dimensions


Cable Assembly Length Range (m) 1 - 305

Page 1 of 3

UQVRZRZ7R

Cable Assembly Length Range (ft) 1 – 999

Ordering Tree

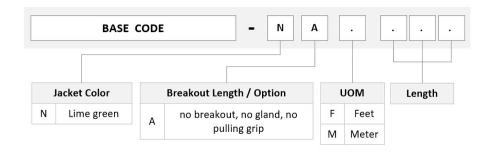

Mechanical Specifications

Cable Retention Strength, maximum $11.24 \text{ lb} @ 0 \degree | 4.40 \text{ lb} @ 90 \degree$

Optical Specifications

Fiber Mode Multimode

Fiber Type OM5, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Indoor | Plenum

Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Below maximum concentration value

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

ROHS Compliant UK-ROHS Compliant



Included Products

760250039 – Fiber indoor cable, LazrSPEED® Plenum MPO Light Duty for Patchcords, 16 fiber, Multimode P-016-MP-5G-F30LM OM5, Feet jacket marking, Lime green jacket color

Page 2 of 3

UQVRZRZ7R

860659158

 Fiber Optic Connector Kit, multimode, OM3/OM4, MPO-16/APC, ULL, pinned, green, for 3 mm cable