

# FFV4S4-65C-R7



20-port sector antenna, 4x 617-894, 8x 1695-2690 MHz, 65° HPBW and 8x 3300-4200 MHz, 90° HPBW, 7x RET

- All Internal RET actuators are connected in "Cascaded SRET" configuration
- Cluster connectors for the beam-forming array, including eight RF ports plus one calibration port
- Antenna shape optimized for wind load reduction

## General Specifications

<b>Antenna Type</b>	Sector- and beamforming
<b>Band</b>	Multiband
<b>Calibration Connector Interface</b>	M-LOC
<b>Calibration Connector Quantity</b>	1
<b>Color</b>	Light Gray (RAL 7035)
<b>Grounding Type</b>	RF connector inner conductor and body grounded to reflector and mounting bracket
<b>Performance Note</b>	Outdoor usage
<b>Radome Material</b>	Fiberglass, UV resistant
<b>Reflector Material</b>	Aluminum
<b>RF Connector Interface</b>	4.3-10 Female   M-LOC
<b>RF Connector Location</b>	Bottom
<b>RF Connector Quantity, high band</b>	8
<b>RF Connector Quantity, mid band</b>	8
<b>RF Connector Quantity, low band</b>	4
<b>RF Connector Quantity, total</b>	20

## Remote Electrical Tilt (RET) Information

<b>RET Hardware</b>	CommRET v2
<b>RET Interface</b>	8-pin DIN Female   8-pin DIN Male
<b>RET Interface, quantity</b>	2 female   2 male
<b>Input Voltage</b>	10–30 Vdc
<b>Internal RET</b>	High band (1)   Low band (2)   Mid band (4)
<b>Power Consumption, active state, maximum</b>	8 W
<b>Power Consumption, idle state, maximum</b>	1 W


# FFV4S4-65C-R7

**Protocol** 3GPP/AISG 2.0 (Single RET)

## Dimensions

**Width** 498 mm | 19.606 in  
**Depth** 197 mm | 7.756 in  
**Length** 2438 mm | 95.984 in  
**Net Weight, antenna only** 49.6 kg | 109.349 lb  
**TDD Column Spacing** 41 mm | 1.614 in

## Array Layout

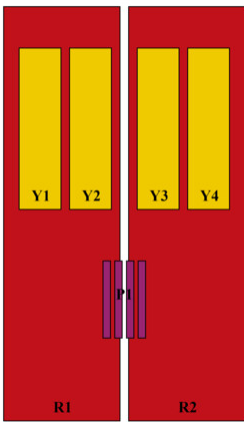

Array ID	Frequency (MHz)	RF Connector	RET (SRET)	AISG No.	AISG RET UID
R1	617-894	1 - 2	1	AISG1	CPxxxxxxxxxxxxxxxxR1
R2	617-894	3 - 4	2	AISG1	CPxxxxxxxxxxxxxxxxR2
Y1	1695-2690	5 - 6	3	AISG1	CPxxxxxxxxxxxxxxxxY1
Y2	1695-2690	7 - 8	4	AISG1	CPxxxxxxxxxxxxxxxxY2
Y3	1695-2690	9 - 10	5	AISG1	CPxxxxxxxxxxxxxxxxY3
Y4	1695-2690	11 - 12	6	AISG1	CPxxxxxxxxxxxxxxxxY4
P1	3300-4200	13 - 20	7	AISG1	CPxxxxxxxxxxxxxxxxP1

(Sizes of colored boxes are not true depictions of array sizes)

## Port Configuration



# FFV4S4-65C-R7

## Electrical Specifications

<b>Impedance</b>	50 ohm
<b>Operating Frequency Band</b>	1695 – 2690 MHz   3300 – 4200 MHz   617 – 894 MHz
<b>Polarization</b>	±45°
<b>Total Input Power, maximum</b>	1,400 W @ 50 °C

## Electrical Specifications

	<b>R1,R2</b>	<b>R1,R2</b>	<b>Y1-Y4</b>	<b>Y1-Y4</b>	<b>Y1-Y4</b>	<b>Y1-Y4</b>
<b>Frequency Band, MHz</b>	<b>617–698</b>	<b>698–894</b>	<b>1695–1880</b>	<b>1850–1990</b>	<b>1920–2200</b>	<b>2490–2690</b>
<b>RF Port</b>	1,2,3,4	1,2,3,4	5,6,7,8,9,10,11,12	5,6,7,8,9,10,11,12	5,6,7,8,9,10,11,12	5,6,7,8,9,10,11,12
<b>Gain, dBi</b>	15.1	15.6	16.4	16.8	17.2	17.6
<b>Beamwidth, Horizontal, degrees</b>	67	57	63	64	61	57
<b>Beamwidth, Vertical, degrees</b>	10.2	8.6	6.7	6.3	5.9	5
<b>Beam Tilt, degrees</b>	2–13	2–13	2–12	2–12	2–12	2–12
<b>USLS (First Lobe), dB</b>	17	15	17	17	17	18
<b>Front-to-Back Ratio at 180°, dB</b>	29	30	34	34	34	28
<b>Isolation, Cross Polarization, dB</b>	25	25	25	25	25	25
<b>Isolation, Inter-band, dB</b>	25	25	25	25	25	25
<b>VSWR   Return loss, dB</b>	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
<b>PIM, 3rd Order, 2 x 20 W, dBc</b>	-150	-150	-150	-150	-150	-150
<b>Input Power per Port at 50°C, maximum, watts</b>	250	250	200	200	200	200

## Electrical Specifications, BASTA

<b>Frequency Band, MHz</b>	<b>617–698</b>	<b>698–894</b>	<b>1695–1880</b>	<b>1850–1990</b>	<b>1920–2200</b>	<b>2490–2690</b>
<b>Gain by all Beam</b>	14.8	15.1	16	16.5	16.8	17

# FFV4S4-65C-R7

## Tilts, average, dBi

<b>Gain by all Beam Tilts Tolerance, dB</b>	±0.5	±0.5	±0.6	±0.3	±0.5	±0.6
<b>Beamwidth, Horizontal Tolerance, degrees</b>	±5	±6	±6	±4	±4	±6
<b>Beamwidth, Vertical Tolerance, degrees</b>	±0.5	±1.1	±0.4	±0.3	±0.4	±0.4
<b>USLS, beampeak to 20° above beampeak, dB</b>	17	15	14	14	14	14
<b>Front-to-Back Total Power at 180° ± 30°, dB</b>	20	22	27	27	27	22
<b>CPR at Boresight, dB</b>	16	16	21	20	19	19
<b>CPR at Sector, dB</b>	10	8	8	8	8	2

## Electrical Specifications

	<b>P1</b>	<b>P1</b>
<b>Frequency Band, MHz</b>	<b>3300–3800</b>	<b>3700–4200</b>
<b>RF Port</b>	13,14,15,16,17,18,19,20	13,14,15,16,17,18,19,20
<b>Gain, dBi</b>	15.6	16.4
<b>Beamwidth, Horizontal, degrees</b>	85	77
<b>Beamwidth, Vertical, degrees</b>	6.2	5.7
<b>Beam Tilt, degrees</b>	0–10	0–10
<b>USLS (First Lobe), dB</b>	14	14
<b>Front-to-Back Ratio at 180°, dB</b>	30	29
<b>Coupling level, Amp, Antenna port to Cal port,</b>	26	26

# FFV4S4-65C-R7

dB		
<b>Coupling level, max Amp Δ, Antenna port to Cal port, dB</b>	±2	±2
<b>Coupler, max Amp Δ, Antenna port to Cal port, dB</b>	0.9	0.9
<b>Coupler, max Phase Δ, Antenna port to Cal port, degrees</b>	7	7
<b>Isolation, Cross Polarization, dB</b>	25	25
<b>Isolation, Inter-band, dB</b>	25	25
<b>Isolation, Co-polarization, dB</b>	19	19
<b>VSWR   Return loss, dB</b>	1.5 14.0	1.5 14.0
<b>PIM, 3rd Order, 2 x 20 W, dBc</b>	-140	-140
<b>Input Power per Port at 50°C, maximum, watts</b>	75	75

## Electrical Specifications, BASTA

	<b>3300–3800 MHz</b>	<b>3700–4200 MHz</b>
<b>Gain by all Beam Tilts, average, dBi</b>	15.2	15.6
<b>Gain by all Beam Tilts Tolerance, dB</b>	±0.8	±0.7
<b>Beamwidth, Horizontal Tolerance, degrees</b>	±20	±14
<b>Beamwidth, Vertical Tolerance, degrees</b>	±0.5	±0.5
<b>USLS, beampeak</b>	13	12

# FFV4S4-65C-R7

---

to 20° above  
beampeak, dB

<b>Front-to-Back Total Power at 180° ± 30°, dB</b>	22	21
<b>CPR at Boresight, dB</b>	15	14
<b>CPR at Sector, dB</b>	6	5

## Electrical Specifications, Broadcast 65°

<b>Frequency Band, MHz</b>	<b>3300–3800</b>	<b>3700–4200</b>
<b>Gain, dBi</b>	17.7	18.2
<b>Beamwidth, Horizontal, degrees</b>	65	65
<b>Beamwidth, Vertical, degrees</b>	6.2	5.7
<b>Front-to-Back Total Power at 180° ± 30°, dB</b>	27	26
<b>USLS (First Lobe), dB</b>	17	18

## Electrical Specifications, Service Beam

<b>Frequency Band, MHz</b>	<b>3300–3800</b>	<b>3700–4200</b>
<b>Steered 0° Gain, dBi</b>	20.3	20.7
<b>Steered 0° Beamwidth, Horizontal, degrees</b>	25	24
<b>Steered 0° Front- to-Back Total Power at 180° ± 30°, dB</b>	30	29
<b>Steered 0° Horizontal Sidelobe, dB</b>	12	13
<b>Steered 0° USLS (First Lobe), dB</b>	18	19

# FFV4S4-65C-R7

<b>Steered 30° Gain, dBi</b>	19.6	20.1
<b>Steered 30° Beamwidth, Horizontal, degrees</b>	27	23
<b>Steered 30° Front-to-Back Total Power at 180° ± 30°, dB</b>	28	28

## Electrical Specifications, Soft Split

<b>Frequency Band, MHz</b>	<b>3300–3800</b>	<b>3700–4200</b>
<b>Gain, dBi</b>	19.5	19.8
<b>Beamwidth, Horizontal, degrees</b>	31	29
<b>Front-to-Back Total Power at 180° ± 30°, dB</b>	29	28
<b>Horizontal Sidelobe, dB</b>	19	18
<b>USLS (First Lobe), dB</b>	18	19

## Mechanical Specifications

<b>Wind Loading @ Velocity, frontal</b>	865.0 N @ 150 km/h (194.5 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, lateral</b>	268.0 N @ 150 km/h (60.2 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, maximum</b>	1,037.0 N @ 150 km/h (233.1 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, rear</b>	595.0 N @ 150 km/h (133.8 lbf @ 150 km/h)
<b>Wind Speed, maximum</b>	241 km/h (150 mph)

## Packaging and Weights

<b>Width, packed</b>	565 mm   22.244 in
<b>Depth, packed</b>	309 mm   12.165 in
<b>Length, packed</b>	2625 mm   103.347 in
<b>Weight, gross</b>	65.1 kg   143.521 lb

## Regulatory Compliance/Certifications

# FFV4S4-65C-R7

---

## Agency

CHINA-ROHS

ISO 9001:2015

ROHS

UK-ROHS



## Classification

Above maximum concentration value

Designed, manufactured and/or distributed under this quality management system

Compliant/Exempted

Compliant/Exempted

## Included Products

BSAMNT-3F

- Mounting bracket for cylindrical pipe installations (60-115mm pipe diameter) for fix mechanical tilt applications.

## \* Footnotes

### Performance Note

Severe environmental conditions may degrade optimum performance