

Dual Band Tower Mounted Amplifier, 800/900 MHz, 12 dB, 2 BTS & 4 ANT ports, AISG with 1 RET connector, with 4.3-10 connectors (1 device with 2 sub-units)

- Designed to boost UP-Link Coverage and KPIs
- TMA is operating in AISG & CWA mode, Alarm Current consumption CWA mode 190 mA
- 2 input ports and 4 output ports
- 1 device with 2 sub-units
- Single AISG with 1 RET connector
- New 4.3-10 connectors for improved PIM performance and size reduction

Product Classification	
Product Type	1-BTS:2-ANT (Diplex) Tower mounted amplifier
General Specifications	
Color	Gray
Modularity	2-Twin
Mounting Pipe Hardware	Band clamps (2)
RF Connector Interface	4.3-10 Female
Dimensions	
Height	250 mm 9.843 in
Width	278 mm 10.945 in
Depth	128 mm 5.039 in

42.6-122 mm


Outline Drawing

Mounting Pipe Diameter Range

Page 1 of 4

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: November 16, 2023



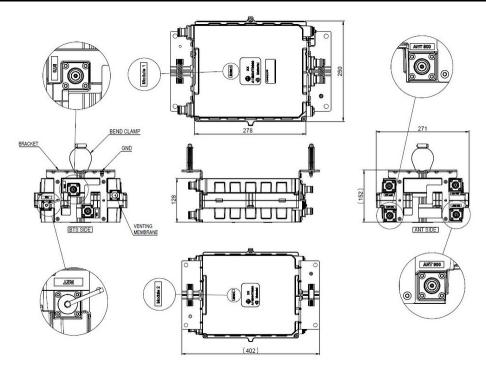

Electrical Specifications

License Band, LNA

CEL 900 | EDD 800

Electrical Specifications, dc Power/Alarm

dc Switching/Redundancy	Yes
Lightning Surge Current	10 kA
Lightning Surge Current Waveform	8/20 waveform
Voltage	7-30 Vdc
Alarm Current, CWA Mode	190 mA ±10 mA

Electrical Specifications, AISG

AISG Connector	8-pin DIN Female
AISG Connector Standard	IEC 60130-9
Protocol	AISG 2.0
Voltage, AISG Mode	10-30 Vdc

Electrical Specifications

1 | 2

1|2

Page 2 of 4

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: November 16, 2023



Branch	1	2	
Port Designation	ANT 800	ANT 900	
License Band	EDD 800, LNA	CEL 900, LNA	
Return Loss, typical, dB	20	20	
Electrical Specifications Rx (Uplink)			
Frequency Range, MHz	832-862	880-915	
Bandwidth, MHz	30	35	
Gain, nominal, dB	12	12	
Noise Figure, typical, dB	1.25	1.25	
Group Delay Variation, maximum, ns	165	165	
Group Delay Variation Bandwidth, MHz	5	5	
Total Group Delay, maximum, ns	240	240	
Return Loss, minimum, dB	16	18	
Insertion Loss - Bypass Mode, typical, dB	2.7	2.7	
Electrical Specifications Tx (Downlink)			
Frequency Range, MHz	791-821	925–960	
Bandwidth. MHz	30	35	


Frequency Range, Mriz		/91-021	923-900
Bandwidth, MHz		30	35
Insertion Loss, typical, dB		0.75	0.75
Group Delay Variation, maximu	ım, ns	60	65
Group Delay Variation Bandwid	ith, MHz	5	5
Total Group Delay, maximum,	ns	110	110
Return Loss, minimum, dB		18	18
Return Loss, typical, dB		20	20
Input Power, RMS, maximum,	W	200	200
Input Power, PEP, maximum, V	V	2000	2000
3rd Order PIM, typical, dBc		-156	-156
3rd Order PIM Test Method		Two +43 dBm carriers	Two +43 dBm carriers

Block Diagram

Page 3 of 4

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: November 16, 2023

COMMSCOPE®

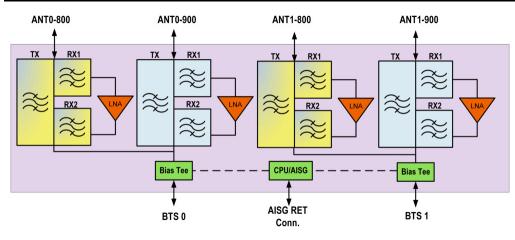

Environmental Specifications

Operating Temperature	-40 °C to +65 °C (-40 °F to +149 °F)
Relative Humidity	Up to 100%
Corrosion Test Method	IEC 60068-2-11, 30 days
Ingress Protection Test Method	IEC 60529:2001, IP67
Packaging and Weights	

Included	Mounting hardware	
Volume	8.9 L	
Weight, net	12.2 kg 26.896 lb	

Regulatory Compliance/Certifications

Agency Classification

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

* Footnotes

License Band, LNA License Bands that have RxUplink amplification

Page 4 of 4

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: November 16, 2023

