NG4-SPLTR-MODULES

NG4access Splitter Module

- *Product complies with the Build America, Buy America Act (BABAA) requirements of the Infrastructure Investment and Jobs Act of 2021 (Pub. L. 117- 58, §§ 70901-70953), or is the subject of a waiver approved by the Secretary of Commerce or designee. Compliance requirements and waiver applicability vary based on government funding program. Check the laws and regulations for your specific program.

Splitter VAMs are used to split (or combine) optical signal power from one fiber to multiple fibers. NG4access VAM splitters can be used for signal distribution in PON networks or for redundant path route protection. NG4access splitter VAMs occupy up to three access trays in the universal chassis and snap easily into place.

Product Classification

Regional Availability	Asia | Australia/New Zealand | EMEA | Latin America | North America
Portfolio	CommScope®
Product Type	Splitter module
Product Brand	NG4access®
Product Series	FACT | NG4
Government Funding	Build America Buy America (BABA) compliant*
Warranty	For more information, please consult our Product Warranty guidelines

General Specifications

Device Type	Plug-and-play module
Functionality	Monitoring | Splitting
Access	Front
Application	For use with NG4 access frames
Interface, front	LC/APC
Interface, Input	LC/APC
Interface, Output	LC/APC
Tray Orientation	Left orientation | Right orientation

Dimensions

Height	13.21 mm | 0.52 in

COMMSCOPE®

NG4-SPLTR-MODULES

Width	159.77 mm	6.29 in
Depth	130.3 mm	5.13 in

Ordering Tree

NG4 - V ☐ ☐ ☐ ☐ ☐ ☐

Module type

S	Splitter

Connector orientation

K	LC UPC
M	LC APC
7	SC UPC
L	SC APC

Module orientation

L	Left
R	Right

Port configuration

F	All front

Number of splitters

1	One	5	Five
2	Two	6	Six
3	Three	7	Seven
4	Four	8	Eight

Split radio

B	1 x 2	50/50
4	1 x 4	25/25/...
8	1 x 8	12.5/12.5/...
16	1 x 16	...
32	1 x 32	...
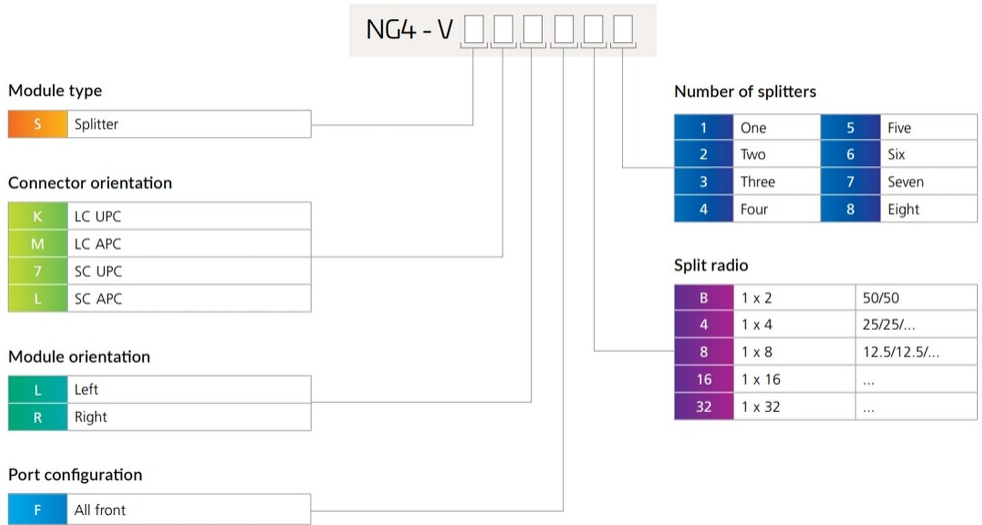
Packaging and Weights

Packaging quantity	1

* Footnotes

Warranty	For more information, please consult our Product Warranty guidelines

COMMSCOPE®